

Analysis of EEG Signal for Epilepsy Seizure Detection Using Machine Learning

K. Heena Kausar^a, Ch Durga Mallikarjun Rao^b

^aElectronics & Communication Engineering, St.Martin's Engineering College, Dhulapally, Secundrabad, India
E.Mail: Heenakausarece@smec.ac.in

^bElectronics & Communication Engineering, St.Martin's Engineering College, Dhulapally, Secundrabad, India

Abstract- The brain is a vital organ responsible for regulating various bodily functions. An electroencephalogram (EEG) is a powerful tool for recording brain activity from the scalp. Analyzing EEG signals plays a key role in diagnosing and treating neurological conditions such as epilepsy, seizures, and other brain disorders. However, these signals are often affected by noise and artifacts, making analysis challenging. Accurate evaluation of EEG signals is critical for reliable diagnosis. Numerous approaches have been developed to achieve high-precision analysis. In this study, Discrete Wavelet Transform (DWT) is utilized to pre-process EEG signals, breaking them down into five distinct frequency bands. Subsequently, features such as mean, standard deviation, root mean square (RMS), entropy, energy, and relative energy are extracted. These features are classified using machine learning algorithms, including Support Vector Machine (SVM), K-Nearest Neighbor (KNN), and Naive Bayes (NB). The findings reveal that SVM achieves the highest performance, with a classification accuracy of 99.5%, specificity of 100%, and sensitivity of 100% when distinguishing between normal and epileptic subjects.

Keywords: EEG, SVM, Epilepsy, DWT, Artifacts, Classifier

1. INTRODUCTION

Epilepsy, characterized by abnormal neural activity in the brain, affects approximately fifty million people worldwide. In 2015, seizures were responsible for an estimated 125,000 deaths. This condition is more prevalent among the elderly. Epileptic seizures often remain undetectable over extended periods, complicating timely diagnosis. Diagnosing epilepsy involves identifying the onset of seizures and uncovering the underlying causes. An electroencephalogram (EEG) is a valuable tool for monitoring brain activity and assessing the risk of seizures. EEG signals are interpreted by specialists to differentiate and classify various seizure patterns.

However, the visual examination of such signals is time-intensive, demanding, and requires expertise. This manual process can reduce the efficiency of neurologists analyzing patient recordings. To address these challenges and improve the accuracy of seizure

diagnosis, computational systems are being developed to create effective models for seizure classification and detection, enhancing diagnostic efficiency. EEG is a method used to capture the brain's electrical activity by placing electrodes on the scalp following the international 10-20 system. These signals are classified into five major frequency bands: delta, theta, alpha, beta, and gamma. EEG testing is painless and involves small sensors attached to the scalp, with signals recorded and analyzed by a computer system before being reviewed by a specialist. Although EEG provides valuable insights into brain function, it is often contaminated by artifacts, which can lead to errors in interpretation and diagnosis. To mitigate these issues, advanced EEG signal processing techniques are employed to intelligently analyze the data, improving the reliability of diagnostic and treatment methods.

2. RELATED WORK

1. The common neurological disorder known as epilepsy is usually diagnosed using EEG data. Visual inspection and interpretation of EEGs is a time-consuming, slow, and subjectivity and human error prone process. Consequently, a great deal of work has been done to develop automatic methods for identifying and classifying epileptic episodes. The current work suggests a novel computer-aided diagnostic technique (CAD) based on the discrete wavelet transform (DWT) and arithmetic coding to identify epileptic seizure signals from normal (seizure-free) signals. The suggested CAD approach consists of three stages. The first stage, which employs DWT to deconstruct EEG signals into approximations and detail coefficients while eliminating non-significant coefficients in light of threshold criteria, places a limit on the number of significant wavelet coefficients.

2. The Electroencephalogram (EEG) provides important information about the many physiological states of the brain. This research presents a methodology for identifying epileptic episodes from EEG recordings of both patients with epilepsy and normal people. The discrete wavelet transform (DWT) analysis of EEG signals utilising linear and nonlinear classifiers forms the foundation of this methodology. With the produced statistical characteristics from DWT, naïve Bayes (NB) and k-nearest neighbour (k-NN) classifiers are used to study the performance of 14 distinct combinations of

two-class epilepsy detection. The individual and combined statistical features derived from the DWT values of normal eyes open and epileptic EEG data provided by the University of Bonn, Germany, have shown that the NB classifier works better and demonstrates an accuracy of 100%. It has been discovered that the NB classifier provides superior accuracy with a shorter computation time than the k-NN method. Therefore, real-time, dependable, automatic epileptic seizure detection systems that improve patient care and quality of life are better suited for the detection of epileptic seizures based on DWT statistical features employing NB classifiers.

3. Research on the identification of epileptic seizures has been done for a number of years in order to facilitate an automated diagnosis system that would ease the burden on physicians. Numerous study papers have been published in this area to identify epileptic episodes. All of these papers need to be thoroughly reviewed. In order to detect epileptic seizures using EEG signals, a study of pattern identification techniques has been attempted. The methods for identifying epileptic seizures have been explored in more than 150 research publications. Additionally, the study of the literature demonstrates that distinct electroencephalogram (EEG) datasets under different settings require different pattern recognition approaches in order to identify epileptic episodes. This is primarily because EEG readings obtained under various circumstances exhibit diverse properties. This subsequently calls for the development of a pattern recognition method to effectively separate EEG data from various disorders from EEG data that is epileptic.

4. An instrument used to assess the electrical activity of the brain caused by variations in brain chemistry is called electroencephalography, or EEG. In feature extraction and classification techniques for identifying and forecasting different brain disorders, the EEG analysis plays a significant role. Seizures, which are a primary symptom of epilepsy, are caused by abrupt, aberrant electrical discharges in the brain. The primary goal of study is to distinguish between normal and epileptic EEG signals. The purpose of the study is to use temporal and frequency aspects to distinguish the pre-seizure and seizure states of the EEG data. Predicting seizures is made easier by employing a fuzzy classifier to categorise various EEG signal states. The approach makes use of pattern-adapted wavelet transform for better classification and hypothetical testing for fine-tuning feature selection. Appropriate feature selection lowers the classifier's computational complexity. The EEG signal artefacts are eliminated with the application of Independent Component Analysis (ICA). For testing, the Children's Hospital in Boston's CHB-MIT EEG scalp dataset is utilised. The classification accuracy for seizures is 96.48%, the True Positive Rate is 96.52%, the False Positive Rate is 0.352, and the classification accuracy for pre-seizure states, which occur 13–110 s

before seizures, is 96.02%

5. There are numerous, continual initiatives to develop automatic seizure detection since the manual detection of electrographic seizures in continuous electroencephalogram (EEG) monitoring is exceedingly time-consuming and requires a qualified expert. The capacity of machine learning techniques to categorise seizure diseases from a vast quantity of data and offer neurologists with pre-screened results has led to an aggressive application of these techniques to this problem. To analyse and categorise seizures using EEG signals, a number of characteristics, data transformations, and classifiers have been investigated. Certain jointly applied features that were employed in the classification may have contributed in a similar way throughout the literature, rendering them unnecessary for the learning process. In order to characterise epileptic episodes using EEG signals, this work attempts to thoroughly summarise feature descriptions and their interpretations. It also reviews classification performance metrics. We ran an experiment to look at each feature's quality separately in order to give useful information about feature selection. The non-parametric probability distribution estimation and the Bayesian error were used to assess each feature's significance. Additionally, a correlation-based feature selection was used in a redundancy analysis. The findings shown that the seizures could be significantly captured by the following features: variance, energy, nonlinear energy, and Shannon entropy computed on a raw EEG signal; additionally, variance, energy, kurtosis, and line length calculated on wavelet coefficients. An improvement of 4.77-13.51% in the Bayesian error was obtained when compared to a baseline technique that classified all epochs as normal

6. In this study, an efficient method utilising wavelet-based non-linear analysis and genetic algorithm optimised support vector machine (GA-SVM) is proposed to address five difficult classification problems, aiming to address the issues of low accuracy, poor universality, and functional singleness for seizure detection. We want to investigate if double-density discrete wavelet transform (DD-DWT) can break down the original EEG into distinct sub-bands in place of the conventional discrete wavelet transform (DWT). Two classifiers receive the extracted Hurst exponent (HE) and fuzzy entropy (FuzzyEn) as input features. The GA-SVM configured with less features is found to accomplish the noteworthy classification performance on these ranking non-linear characteristics for a variety of combinations, including AB-CD-E, A-D-E, ABCD-E, C-E, and D-E, with accuracies of 99.36%, 99.60%, 100%, and 100%, respectively. The outcomes show that our technique is not only suitable for handling multiclass problems but also has greater expansibility and lesser complexity. With these qualities, this approach would start to seem like a desirable substitute for a real clinical diagnosis.

7. As a diagnostic decision support tool for the management of epilepsy, we presented a classification model based on a multilayer perceptron neural network (MLPNN). Discrete wavelet transform (DWT) was used to break down EEG signals into frequency sub-bands. For every frequency sub-band, the wavelet coefficients were grouped using the K-means algorithm. The wavelet coefficient distribution to the clusters was utilized to compute the probability distributions, which were then fed into the MLPNN model. To assess how well the suggested model performed in classifying various mixes of healthy segments, epileptic seizure-free segments, and epileptic seizure segments, we ran five separate tests. We demonstrated that the suggested model produced classification accuracy rates that were sufficient.

3. Data Collection and Methodology

1) The proposed classification of the EEG signal is done using following approach 1) pre-processing of EEG signals

2) feature extraction from decomposed signal, and 3) classification using classifier model.

In the present study, EEG data sets (A, B, C, D and E) is preprocessed by DWT to decompose into five sub band signals using seven level decomposition [12]. Next, useful features like Entropy, Mean, Standard deviation, Energy, RMS, and Relative power are derived from each sub-band. Finally, Extracted features are selected and given as input classifier for epilepsy classification.

3.1 Description of EEG Dataset

The publicly available EEG is taken from University of Bonn ([12]. This dataset include five sets labels such as A, B, C, D and E, with each having 100 single- EEG channel of time duration 23.6 sec having $f = 173.6$ Hz sampling rate. In Each segment of data, $N = 4097$ data points are positioned at the intervals of $1/173.61$ th of 1s. The sets A and B are acquired from scalp EEG recordings of five healthy volunteers subjects using a standard international electrode placement. The subjects were asked to relax in an awake state with eyes open and eyes closed for SET A and SET B respectively [18]. For Interictal and Ictal epileptic activities, the database sets C, D, and E are acquire from the epileptic subjects through intracranial electrodes. The summary of dataset is shown in table 1.

3.2 EEG Pre-processing

In the EEG preprocessing stage, DWT decomposition is employed as a tool to extract five physiological EEG frequency bands: delta (0-4 Hz), theta (4-8 Hz), alpha (8-12 Hz), beta (13-30 Hz), and gamma (30-60 Hz). Initially, the signal is simultaneously passed through low-pass (LP) and high-pass (HP) filters in the first stage of the DWT. The outputs—an approximation (A1) and a

detail (D1)—are produced by the low and high pass filters at the first level. Following the Nyquist rule, the output signal is downsampled by two, maintaining half the original signal's bandwidth. This process is repeated for the first-level approximation and detailed coefficients at subsequent levels. During each decomposition step, the frequency resolution is increased and downsampled by splitting its time resolution. Given that the EEG dataset has a sampling frequency of 173.61 Hz, the maximum usable frequency, as per the Nyquist rate, should be half the sampling frequency, or 86.81 Hz [15].

EEG signals are generally classified according to the placement of electrodes on the scalp. In signal processing, distinguishing normal from abnormal rhythms is based on frequency measurements. Similarly, EEG waveforms such as alpha, beta, gamma, theta, and delta are classified by their signal frequency. The continuous rhythm of

brain waves is categorized by frequency bands, which vary based on the brain's mental state. The following details outline the EEG frequency bands:

Delta wave (0.1-4 Hz): The delta wave has the highest amplitude but is the slowest. It is prevalent during all stages of sleep, normal in infants, and abnormal in awake adults.

Theta wave (4-8 Hz): These waves are linked to subconscious activity and are observed during meditation and deep sleep.

Alpha wave (8-13 Hz): Alpha waves are common across all age groups, particularly in adults with closed eyes, and represent the brain's white matter.

Beta wave (13-30 Hz): Symmetrical on both sides of the frontal brain region, these low-amplitude waves occur during mental activity.

Gamma wave (30-100 Hz): Associated with consciousness and perception, gamma waves appear during heightened alertness.

To identify these frequency bands, a method known as the Discrete Wavelet Transform (DWT) is employed. This technique detects the presence of these bands, and additional features are extracted by decomposing the signal using the Daubechies Wavelet.

3.3 Feature Extraction

The below Fig 1 shows the basic methodology for determining the frequency bands of EEG signal. The input EEG signal is taken from Bonn database. The Dataset consist of both normal and epileptic seizure signal. A Sampling rate of 173.61 Hz. is used to sample the signal. MATLAB software is used for analyzing the input EEG signal. As wavelet transform is used for

analyzing the signal both in time frequency domain, hence the input signal is decomposed to 7 levels obtain the various filter coefficient and details vector values. As the EEG signal consist of many artifacts due to interferences, hence using this transformation we are able to obtain the various frequency bands of EEG signal and thus eliminating the unwanted signal frequencies. In the further analysis, we calculate the time frequency domain parameter of these EEG frequency bands like mean, standard deviation, entropy, energy, relative power and RMS.

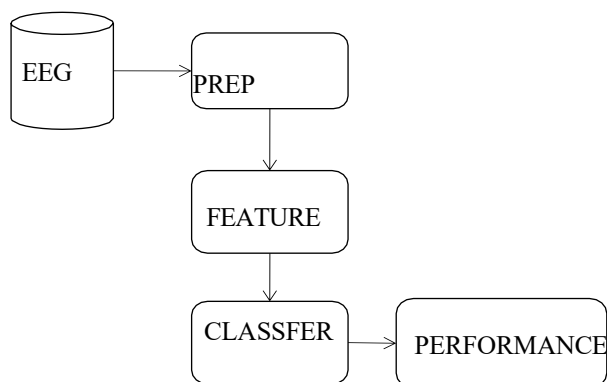


Fig 1: Proposed classification model

- (1) The mean of wavelet filter coefficient in different sub band is calculated by

$$\mu_i = \frac{\sum_{j=1}^n x_{ij}}{n} \quad i=0,1,2,3,4,5,6 \quad (1)$$

- (2) The standard deviation for each sub band is square root of mean give by

$$\sigma^2 = \frac{1}{n-1} \sum_{i=1}^n (x_i - \mu)^2 \quad (2)$$

- (3) The subband energy is obtained by

$$E = \sum_{i=1}^n |x_i|^2 \quad i=0,1,2,3,4,5,6 \quad (3)$$

- (4) The Entropy for each sub-band is given by

$$\text{Entropy (EN)} = -\sum_{i=1}^n x_i \log x_i \quad i=0,1,2,3,4,5,6 \quad (4)$$

- (5) The Relative energy(RE) is calculated by

$$\mu_i = \frac{E_i}{E_{\text{total}}} \quad i=0,1,2,3,4,5,6 \quad (5)$$

3.4 Classification of different machine Learning algorithms

Several approaches and methods can be used for features extraction and classification of seizure. The differences between normal and abnormal cases are based on these

extracted and selected features. The extracted features are given to a classifier model for seizure detection between normal and epileptic patient. In the proposed study we have used three classification model named as SVM, KNN & NB classifier to evaluate the performance proposed model.

Support Vector Machine [SVM]: Support Vector Machines (SVMs) are a popular machine learning algorithm used in seizure detection due to their ability to classify complex patterns in data. In seizure detection, SVMs are employed to analyze features extracted from EEG signals, such as frequency, amplitude, or entropy, and distinguish between seizure and non-seizure states. SVMs work by finding the optimal hyperplane that separates data points of different classes (e.g., seizure vs. non-seizure) in a high-dimensional feature space. If the data is not linearly separable, SVMs use kernel functions (e.g., radial basis function or polynomial) to transform the data into a higher dimension where a linear separation is possible. The advantage of SVMs in seizure detection lies in their robustness, efficiency with small datasets, and ability to handle non-linear data patterns, making them a reliable tool for early and accurate seizure detection in medical applications.

K-Nearest Neighbor (KNN): algorithm is a simple yet effective machine learning technique used in seizure detection. KNN classifies data points based on the majority class of their closest neighbors in the feature space. In seizure detection, features such as frequency, amplitude, or spectral power are extracted from EEG signals, and KNN analyzes these to classify segments as seizure or non-seizure. KNN operates by computing the distance (e.g., Euclidean or Manhattan distance) between a test data point and all points in the training dataset, identifying the k- nearest neighbors, and assigning the most common class among these neighbors to the test point. KNN is advantageous for seizure detection because it is non-parametric, easy to implement, and performs well when the feature space is well-defined. However, it can be computationally intensive for large datasets and may require proper feature scaling to ensure distance metrics are meaningful.

Naive Bayes (NB): Naive Bayes is a probabilistic machine learning algorithm often used in seizure detection because of its simplicity and effectiveness with high-dimensional data like EEG signals. It is based on Bayes' Theorem, which calculates the probability of a class (e.g., seizure or non-seizure) given certain features, assuming that the features are independent. In seizure detection, features such as signal amplitude, frequency, or statistical measures are extracted from EEG data.

Naive Bayes evaluates the likelihood of these features occurring in seizure or non-seizure states and classifies the data accordingly. Despite its assumption of feature independence, which

may not always hold in EEG data, Naive Bayes often performs well due to its computational efficiency and ability to handle noisy or small datasets. Its lightweight computational requirements make Naive Bayes a good choice for real-time seizure detection in portable or resource-constrained medical devices.

4. Results and Discussion

The process of extracting features from EEG signals is carried out in two primary steps. Firstly, the input EEG signal is decomposed into five distinct sub-band signals—alpha, beta, gamma, theta, and delta—using the Discrete Wavelet Transform (DWT). For this decomposition, the Db7 wavelet function is chosen as it provides an appropriate decomposition level. The decomposition is performed at a sampling frequency of 173.6 Hz. In the second step, the wavelet filter coefficients obtained from the decomposition are analyzed further. Relevant statistical features are selected and computed using MATLAB (R2021). This ensures a detailed examination of the EEG signal for different sub-band frequencies. Figures 2 and 3, as well as Figures 4 and 5, illustrate the plots of the input EEG signals for subjects S001 and Z001, showcasing the decomposition across different EEG frequency bands.

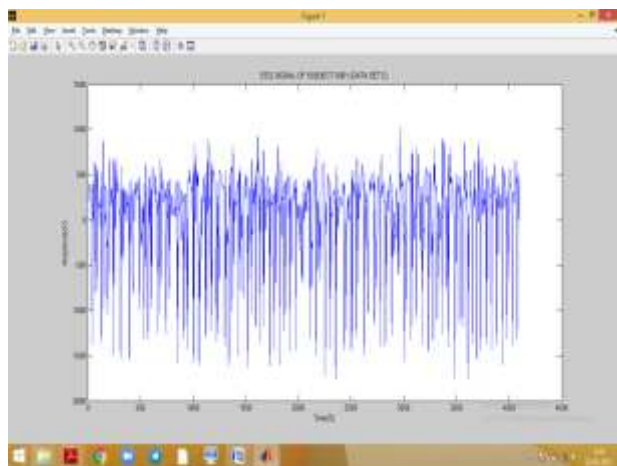


Fig 2: Input EEG signal of subject S001

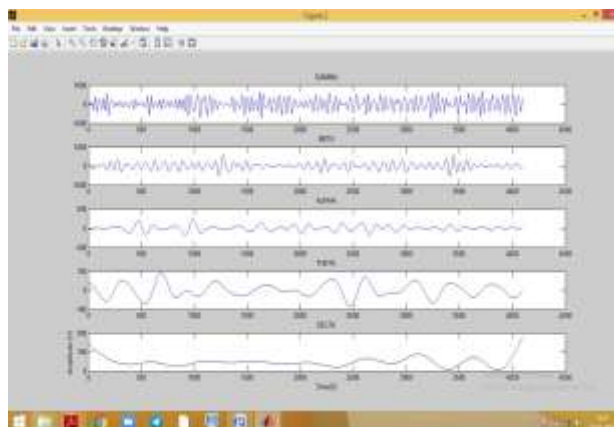


Fig 3: Obtained Frequency bands of subject S001

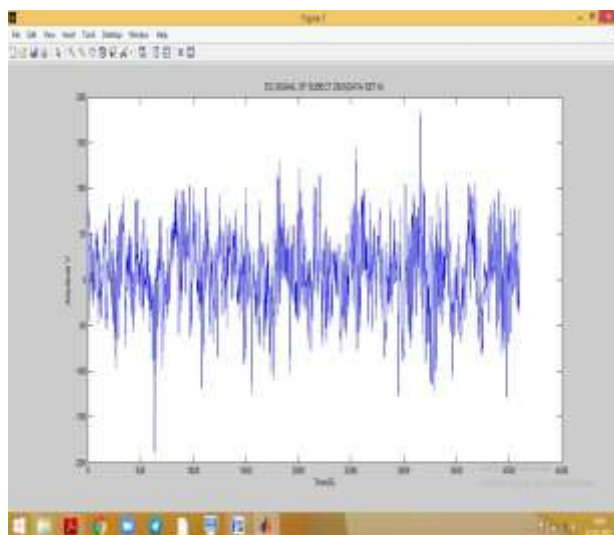


Fig 4: Input EEG signal of subject Z001

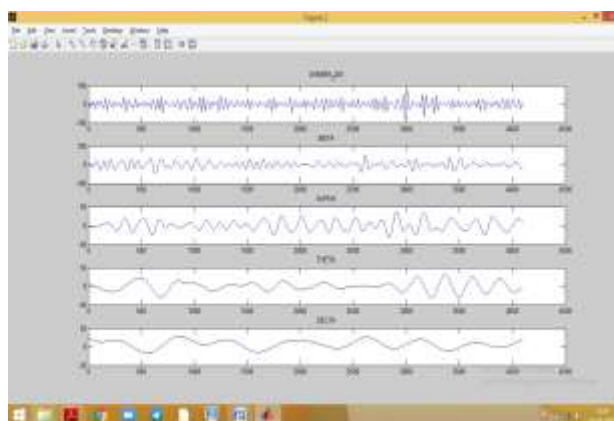


Fig 5: Frequency bands of subject Z001

In the subsequent step, the input EEG signal is decomposed into five distinct sub-signals, and statistical feature values such as Mean, Standard Deviation, Energy, Entropy, Relative Powers, and RMS are computed for

each sub- band for both normal and epileptic signals. The features extracted from each sub-band of Datasets A and E are then fed into the classifiers. The performance of the classifiers in seizure detection is evaluated based on specificity, sensitivity, and accuracy, as defined in [19].

$$\text{Sensitivity} = \frac{TP}{TP+FN} * 100 \quad (6)$$

$$\text{Specificity} = \frac{TN}{TN+FP} * 100 \quad (7)$$

$$\text{Accuracy} = \frac{TP+TN}{TP+FN+TN+FP} * 100 \quad (8)$$

A sample of test data from SET A and SET E is presented in Table 4. This data illustrates the calculation of statistical parameters for SET A and SET E across six distinct parameters. The classification details of the test cases are outlined in Table 2, while Table 3 displays the performance analysis of the signals, evaluated using various classification models in terms of accuracy, specificity, and sensitivity.

Table 1: A summary of clinical data used

Settings	SET A	SET E
Subjects	5 healthy	5 epileptic
Type of Electrode	surface	Intracranial
Placement of Electrode	International 10-20 system	Epileptogenic zone
Subject condition	Awake, eyes open	Seizure (Ictal)
Number of epochs/ Epoch duration (s)	100 25.6	100 25.6

Table 2: Classification description of test cases.

Test case	Case of Seizure	Classification Description
Case1	SET A VS SET E	Healthy Persons with eye open vs Epileptic patients during seizure activity

Table 3: Assessment of Set A vs Set E Performance Using Various Machine Learning Methods

Method	% in Accuracy	% Specificity	% Sensitivity
KNN	98.5	99	100
SVM	99.5	100	100
NB	98.3	98	98

CONCLUSION

Epilepsy is a neurological disorder characterized by abnormal brain activity leading to seizures. Detecting seizures in EEG signals through visual inspection is challenging, particularly for long-duration recordings, as it can be time- consuming and prone to error. To address this, supervised machine learning techniques have been explored for EEG signal classification. In the proposed method, Discrete Wavelet Transform (DWT) is employed to analyze EEG signals by decomposing them into various sub-bands, extracting detailed and approximate wavelet coefficients. These features are then classified using models such as Support Vector Machine (SVM), k-

Nearest Neighbors (KNN), and Naive Bayes (NB), with performance evaluated based on accuracy, sensitivity, and specificity. Among these, SVM demonstrated the highest classification accuracy, delivering more reliable and effective results compared to the other methods.

Table 4: Sample test data

Patient Number	Statistical Parameter	Delta band	Theta band	Alpha band	Beta band	Gamma band
Patient 1 3001	Mean	46.42	-0.832	-0.368	-0.165	0.106
	Standard deviation	34.42	34.40	64.34	158.93	280.08
	Energy	1.01E+08	4.87E+06	1.71E+07	3.01E+08	2.77E+08
	Relative Power	0.089	0.006	0.226	0.748	2.034
	Entropy	0.401	1.332	1.223	1.004	1.035
	RS45	54.34	34.565	64.339	158.969	280.031
Patient 2 3002	Mean	46.4	-0.826	-0.363	-0.167	0.108
	Standard deviation	34.42	34.40	64.34	158.93	280.08
	Energy	1.01E+08	4.87E+06	1.71E+07	3.01E+08	2.77E+08
	Relative Power	0.089	0.006	0.226	0.747	2.032
	Entropy	0.401	1.332	1.223	1.004	1.035
	RS45	54.338	34.565	64.337	158.965	280.035
Patient 1 2001	Mean	46.44	-0.831	-0.368	-0.167	0.105
	Standard deviation	34.42	34.40	64.34	158.93	280.08
	Energy	1.01E+08	4.87E+06	1.71E+07	3.01E+08	2.77E+08
	Relative Power	0.09	0.007	0.228	0.748	2.037
	Entropy	0.401	1.332	1.223	1.004	1.035
	RS45	54.344	34.564	64.335	158.96	280.036
Patient 2 2002	Mean	46.42	-0.838	-0.363	-0.168	0.107
	Standard deviation	34.42	34.40	64.34	158.93	280.08
	Energy	1.01E+08	4.87E+06	1.71E+07	3.01E+08	2.77E+08
	Relative Power	0.089	0.006	0.226	0.744	2.037
	Entropy	0.405	1.33	1.223	1	1.038
	RS45	54.343	34.489	64.332	158.95	280.031

REFERENCES

- [1]. R. G. Andrzejak, K. Lehnertz, F. Mormann, C. Rieke, P. David, and C. E. Elger, (2001). "Indications of nonlinear deterministic and finite-dimensional structures in time series of brain electrical activity: dependence on recording region and brain state," Physical Review E, vol. 64, no. 6, Article ID061907, 8 pages,
- [2]. Mohammad Zuber, et al, (2017) "Denoising of EEG Signals For Analysis of Brain Disorders: A Review," International Research Journal of Engineering and Technology (IRJET), vol. 4, Issue: 07.
- [3]. Hasilaile. Abdullah et al. (2013)., "Double Density Wavelet For EEG Signal Denoising," 2nd International Conference on Machine Learning and Computer Science, Kuala Lumpur, Malaysia, August 25-26.
- [4]. Geeta Kaushik et al. (2012)., "Biomedical Signal Analysis through Wavelets : A Review," International Journal Of Advanced Research in Computer Science And Software Engineering, vol. 2, issue 9, pp. 422-428, September,
- [5]. P. Ashok Babu, K. V. S. V. R. Prasad (2011)., "Removal Of Ocular Artifacts From EEG Signals Using Adaptive Threshold PCA and Wavelet Transforms," International Conference on Communication Systems and Network Technologies, Katra, Jammu, June 3-5,
- [6]. Patil Suhas S. et al, (2012)., "Wavelet Transform to Advance the Quality of EEG Signals in Biomedical

- Analysis,” 3rd International Conference On Computing Communication Systems and Networking Technologies, Coimbatore, July 26- 28
- [7]. Priyanka Khatwani, Archana Tiwari (2013)., “A Survey on Different Noise Removal Techniques Of EEG Signals,” International Journal of Advanced Research in Computer and Communication Engineering, vol. 2, issue 2, pp. 1091-95, February
- [8]. Weidong Zhou et al (2004)., “Removal of EMG and ECG Artifacts from EEG Based On Wavelet Transform and ICA,” Proceedings Of the 26th Annual Conference Of The IEEE EMBS San Francisco, CA, USA, September 1-5,
- [9]. Sartori CAF, Sevegnani FX (2010). Fault classification and detection by wavelet-based magnetic signature recognition. IEEE Trans. Magn., 46(8):2880-2883.
- [10]. Dwivedi UD, Singh SN (2010). Enhanced detection of power-quality events using intra and interscale dependencies of wavelet coefficients. IEEE Trans. Power Deliv. 25(1):358-366.
- [11]. L. Guo, D. Rivero, J. Dorado, J. R. Rabuñal, and A. Pazos, “Automatic epileptic seizure detection in EEGs based on line length feature and artificial neural networks,” Journal of Neuroscience Methods, vol. 191, no. 1, pp. 101–109, (2010).
- [12]. F. Pedregosa, G. Varoquaux, A. Gramfort et al., “Scikit-learn: machine learning in python,” Journal of Machine Learning Research, vol. 12, no. 10, pp. 2825–2830, (2012)
- [13]. Lakshmi VIK, Xiaomin L, Usama Y, Ramakrishnan V, Narayan CK A Twofold Daubechies-wavelet-based module for fault detection and voltage regulation in SEIGs for distributed wind power generation. IEEE Trans. Ind. Electron. 60(4):1638-1651. (2013).
- [14]. O. Faust, U. R. Acharya, H. Adeli, A.D. of Epileptology University of Bonn, Eeg time series data. URL <http://www.meb.uni-bonn.de/epileptologie/science/physik/eegdata.html> Accessed Oct (2016)
- [15]. Asmaa Hamad, Essam H. Houssein, Aboul Ella Hassanien, Aly A. Fahmy. "Feature extraction of epilepsy EEG using discrete wavelet transform", 2016 12th International Computer Engineering Conference ICENCO), (2016) [16] Amin, H.U.; Yusoff, M.Z.; Ahmad, R.F. A novel approach based on wavelet analysis and arithmetic coding for automated detection and diagnosis of epileptic seizure in EEG signals using machine learning techniques. Biomed. Signal Process. Control 2020, 56, 101707.
- [17]. Sharmila, A.; Geethanjali, P. DWT based detection of epileptic seizure from EEG signals using naive Bayes and k-NN classifiers. IEEE Access 2016, 4, 7716–7727.
- [18]. Sharmila, A.; Geethanjali, P. A review on the pattern detection methods for epilepsy seizure detection from EEG signals. Biomed. Eng. Biomed. Tech. 2019, 64, 507–517.
- [19]. Harpale, V.; Bairagi, V. An adaptive method for feature selection and extraction for classification of epileptic EEG signal in significant states. J. King Saud Univ.-Comput. Inf. Sci. 2021, 33, 668–676
- [20]. Boonyakitanont, P.; Lek-Uthai, A.; Chomtho, K.; Songsiri, J. A review of feature extraction and performance evaluation in epileptic seizure detection using EEG. Biomed. Signal Process. Control 2020, 57, 101702.
- [21]. Li, M.; Chen, W.; Zhang, T. Automatic epilepsy detection using wavelet-based nonlinear analysis and optimized SVM. Biocybern. Biomed. Eng. 2016, 36, 708–718.
- [22]. Orhan, U.; Hekim, M.; Ozer, M. EEG signals classification using the K-means clustering and a multilayer perceptron neural network model. Expert Syst. Appl. 2011, 38, 13475–13481
- [23]. Subasi, A.; Gursoy, M.I. EEG signal classification using PCA, ICA, LDA and support vector machines. Expert Syst. Appl. 2010, 37, 8659–8666.
- [24]. Kumar, Y.; Dewal, M.; Anand, R. Epileptic seizure detection using DWT based fuzzy approximate entropy and support vector machine. Neuro computing 2014, 133, 271–279.
- [25]. Potapov, P. On the loss of information in PCA of spectrum-images. Ultramicroscopy 2017, 182, 191–194. [25] Hassan, A.R.; Siuly, S.; Zhang, Y. Epileptic seizure detection in EEG signals using tunable-Q factor wavelet transform and bootstrap aggregating. Comput. Methods Programs Biomed. 2016, 137, 247–259.
- [26] Mursalin, M.; Zhang, Y.; Chen, Y.; Chawla, N.V. Automated epileptic seizure detection using improved correlation-based feature selection with random forest classifier. Neurocomputing 2017, 241, 204–214. [27] Hussain, W.; Qbal, M.S.I.; Xiang, J.; Wang, B.; Niu, Y.; Gao, Y.; Wang, X.; Sun, J.; Zhan, Q.; Cao, R.; et al.
- [28]. Epileptic Seizure Detection With Permutation Fuzzy Entropy Using Robust Machine Learning Techniques. IEEE Access 2019, 7, 182238–182258.

- [29]. [28].Zhou, P.-Y.; Chan, K.C.C. Fuzzy Feature Extraction for Multichannel EEG Classification. IEEE Trans. Cogn.
- [30]. Dev. Syst. 2016, 10, 267–279
- [31]. Alickovic, E.; Kevric, J.; Subasi, A. Performance evaluation of empirical mode decomposition, discrete wavelet transform, and wavelet packed decomposition for automated epileptic seizure detection and prediction.
- [32]. Biomed. Signal Process. Control 2018, 39, 94–102
Ziaullah, M., & Vanjerkhede, K. (2023). Automatic detection of epilepsy seizure in EEG using entropy features and CNN classifier: A deep learning approach. International Neurourology Journal, 27(4), 775-787.
- [33]. Ziaullah, M., & Vanjerkhede, K. (2022). Classification of EEG Signal Using Wavelets and Machine Learning Techniques. Turkish Journal of Computer and Mathematics Education (TURCOMAT), 13(03), 579-587.